

Kepro Hand Operated Geared Travelling Trolley





Capacity 1 Ton to 10 Ton

- * Rugged steel construction of Frame.
- * Lifetime lubricated double sealed ball bearings.
- * Specially contour wheels made of high grade modular Cast Iron
Perfect Contact on I and H beams.
- * The traveling wheel axles are made of high tensile steel.
- * Adjustable to fit various size wide flange and I-Beams.
- * Proof tested to 25% overload.
- * Design generally Complies with International standards.
- * All products are warranted to be free from defects in material
and workmanship for six months from the date of supply.



Kepro Hand Operated Geared Travelling Trolley

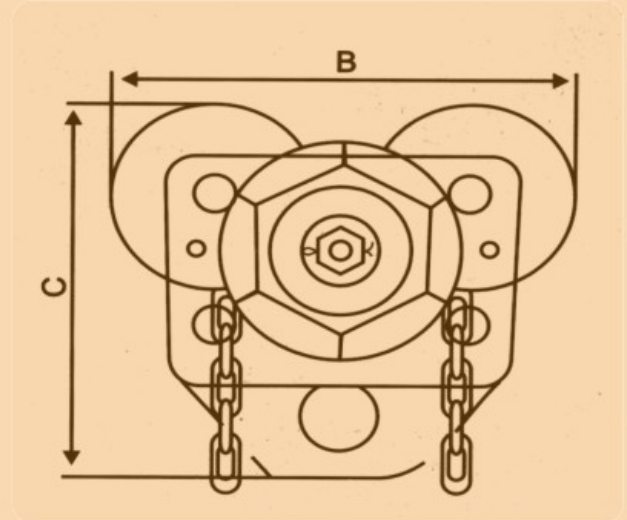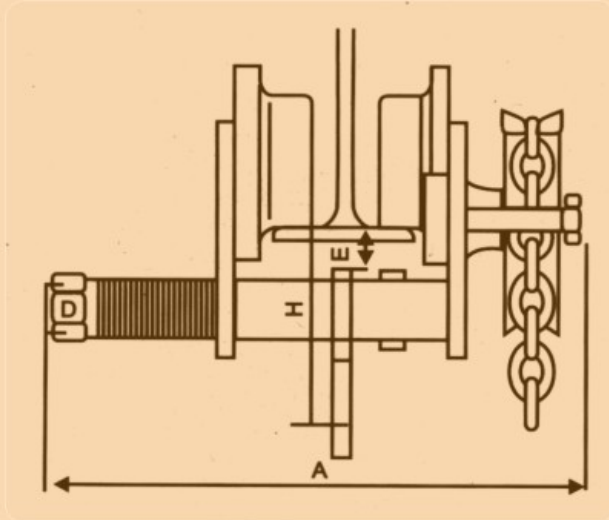

TECHNICAL PARAMETERS

Rated capacity (Ton)		1	2	3	5	10
Test load (Ton)		1.5	2.5	3.75	6.25	12.5
Min. radius of curve (M)		1.0	1.1	1.3	1.4	1.7
Dimensions (mm)	A	246	278	289	328	423
	B	206	233	276	302	390
	C	194	238	283	327	416
	H	97	126	145	170	212
	E	22	28	28	35	42
I-Beam width (mm)		75-125	100-150	100-150	125-175	125-210
Net weight (Kg.)		12.2	18.8	28.9	42.6	82

Warning :

Improper use could result in death or serious injury.

To avoid these hazards :

- * Never operate loads over or near people.
- * Never work under or near loads.
- * Always operate, inspect and maintain these products in accordance with applicable safety codes and regulations.

* Extra Lifts & Higher sizes are available on request.

Due to progressive development of products, Kepro reserve the right to alter the specifications shown within this leaflet without notice.



Marketed By :

Kepro Tools & Equipments Pvt. Ltd.

www.kepro.in

