






KEPRO POLYESTER SLINGS FLAT AND ROUND

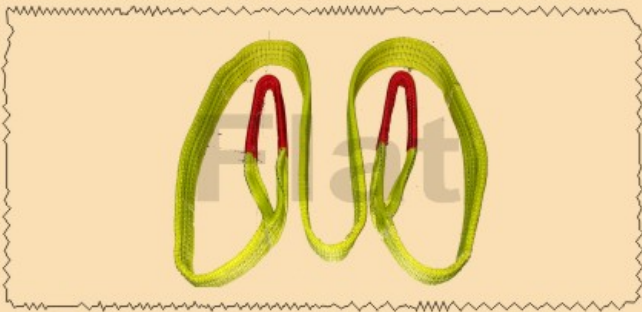

**SAFETY FACTOR
5:1 & 7:1**

TECHNICAL PARAMETERS

Capacity	Type	Colour	Rated Working Load In Tonnage				Width in Safety Factor	
			Vertical	Basket	Chocker	Angle 90°	5 : 1 (mm)	7 : 1 (mm)
								
1	Flat	Light Purple	1	2	0.8	1.4	25	30
1	Round	Light Purple	1	2	0.8	1.4		
2	Flat	Green	2	4	1.6	2.8	50	60
2	Round	Green	2	4	1.6	2.8		
3	Flat	Yellow	3	6	2.4	4.2	75	90
3	Round	Yellow	3	6	2.4	4.2		
4	Flat	Grey	4	8	3.2	5.6	100	120
4	Round	Grey	4	8	3.2	5.6		
5	Flat	Red	5	10	4.0	7.0	125	150
5	Round	Red	5	10	4.0	7.0		
6	Flat	Dark Grey	6	12	4.8	8.4	150	180
6	Round	Dark Grey	6	12	4.8	8.4		
8	Flat	Dark Blue	8	16	6.4	11.2	200	240
8	Round	Dark Blue	8	16	6.4	11.2		
10	Flat	Orange	10	20	8.0	14.0	250	300
10	Round	Orange	10	20	8.0	14.0		
12	Flat	Dark Orange	12	24	9.6	16.8	300	300
12	Round	Dark Orange	12	24	9.6	16.8		

* Extra Lifts & Higher sizes are available on request.

- Much Lighter than Metal Slings, Easy to Handle.
- High Performance Fibre, High Safety.
- Non Corrosive, Non Conductive, Non Sparking.
- Very Simple, Easy and Safe to Operate.
- Prevention of Slip and Damage on the Surface of Finished Goods.
- Wider Surface Hence Less Pressure at the Points of Contact of the Lifting Object.

