



Powerful Partners®

NSK




Primado2
Total Surgical System

Primado2 Product Lineup

Slim Motor Series

Primado2 Slim Motor **P12**



Slim Handpiece 200 **P13**




Super Slim Handpiece 200 **P14**



Standard Angled Handpiece 200 **P15**



Standard Straight Handpiece 200 **P16**

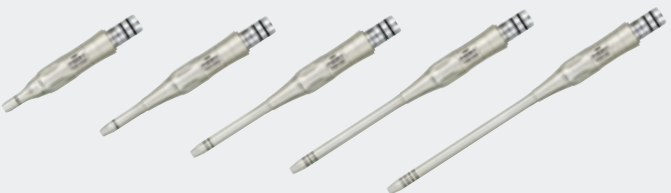


Perforator / Craniotome / Drill **P17-18**



Micro Bone Saw Series

Primado2 Micro Bone Saw **P32-34**

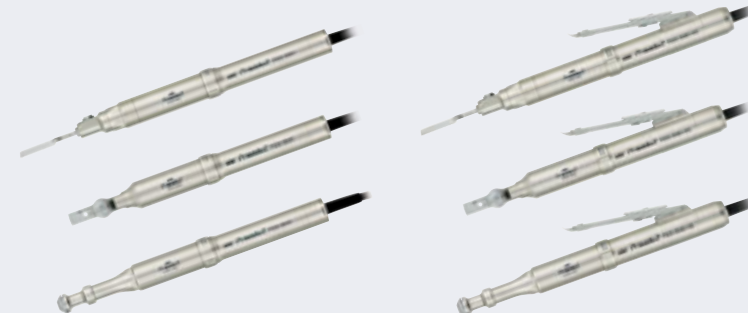


Primado2 Total Surgical System

Primado2 Control Unit **P7-8**



Foot Control

Primado2 Foot Control **P10**




Wire Pin Driver Series

Primado2 Wire Pin Driver **P36**



Wire & Pin Collet **P37**



Drill Attachment **P37**



Reamer Attachment **P38**



Saw Attachment **P38**



High Torque Motor Series

Primado2 High Torque Motor **P20**



High Speed Handpiece 200 **P21**



Slim Handpiece **P23**



Super Slim Handpiece **P24**



Standard Angled Handpiece **P25**



Standard Straight Handpiece **P26**



Perforator / Craniotome / Drill **P27-29**



Contra Angle Handpiece **P30**



Feel the difference

Primado2 is NSK's second generation electric total surgical system, designed for fulfilling surgeons' demands.

During the five years since NSK have distributed Primado, we have obtained various feedback from surgeons throughout the world. Based on their input, Primado2 is uncompromisingly built to assume maximum quality throughout the product line. Four strong lineups including the new motor series, Slim Motor, are introduced in Primado2. They consummate excellent cutting, and achieve weight balance during drilling. Thus, using Primado2 is less fatiguing for surgeons, which is especially beneficial during long hours of surgery, and it allows them to concentrate on the operation at hand. Moreover, the product safety achieved reduces the risk of undesirable events.

Hope you experience the exceptional use that Primado2 provides.



The sign of excellence

Primado2 makes it possible to conduct various types of surgeries. New features include a control unit with a liquid crystal display touch screen, a multifunctional foot control, four lineups of motor handpieces, and extensive attachments. Additionally, easy maintenance is highly valued as all of the Primado2 handpieces and attachments are thermo disinfectant compatible.





Primado2 Control Unit

A 6.5 inch LCD touch screen is newly adopted. The simple design makes it user friendly and easy to use.

Two motor handpieces can be connected to the unit, allowing for easy switching between handpieces.

order code
P200-CU-120

Primado2 Control Unit for 120V

order code
P200-CU-230

Primado2 Control Unit for 230V

- Power Supply : AC120V / 230V 50/60 Hz
- Dimension : W278 x D268 x H160 (mm)
- Weight : 6.9 kg

Settings

Extensive options are available

【Control Unit】

- Brightness • Volume
- Language (English, Japanese, German, French, Spanish, Italian)

【Motor Handpiece】

- Accelerator adjustment (min. 10% - max. 100%)
- Brake adjustment (min. 10% - max. 100%)
- Torque adjustment (min. 30% - 100%)
- Oscillation adjustment (1- 5 times, available only for Wire Pin Driver)

【Attachment】

- Handpiece selection (The rotational speed of the handpiece currently in use appears on the screen.)

Touch Panel

【Main Panel】

- Speed control
- Irrigation control
- Reverse rotation control
- Priming control

【Sub Panel】

- Allows to confirm the assigned functions of each foot control button.

【Mini Panel】

- Button for optional settings.

Configuration Settings

The control unit saves the last configurations made user the Option Set Up button, allowing the operator to proceed right away.

Automatic Recognition for Motor Handpieces

Four types of motor handpieces are automatically recognized by the control unit which displays the corresponding models and rotational speeds for each.

Regulation Equipment- Irrigation Pump

Primado2 comes equipped with an irrigation pump. Irrigation can be adjusted with 5% interval values allowing up to max. 75ml/min.



Primado2 Foot Control

The foot control is available in two models: single (one functional button), and multi (three functional buttons). Each button can be set to a specific function to meet the operator's preference.



Functions are able to be allotted to each button

【 Allocatable Features 】

- Foot control ON/OFF
- A ⇔ B control (switching between motor handpieces)
- Speed control
(adjust rotational speed; min. 30% ⇒ default ⇒ max. 100%)
- Reverse rotation mode
- Irrigation ON/OFF
- Flush (continuous 100% irrigation when depressed)
- Disable (disables function to the selected foot control button)



order code
FC-73

Primado2 Single Foot Control

- 1 pedal with button
- Speed control : variable
- IP code: IPX8



order code
FC-74

Primado2 Multi Foot Control

- 1 pedal with 3 buttons
- Speed control : variable
- IP code: IPX8

Slim Motor Series

- Slim Design** : A new design that combines being slim, compact and light, which reduces surgeons' stress during long hour operations.
- High Speed** : High speed rotation of maximum 80,000min⁻¹ makes it possible to cut precisely.
- Versatile** : Various types of handpieces available including a hand control type.
- Easy Maintenance** : All the motors and handpieces can be washed by a thermo disinfecter.
- Durable** : Motors and handpieces are made to be highly durable due to NSK's long years of experience in high precision technology, and are protected with a NSK original special coating called DURACOAT, creating long-lasting and scratch-free quality products.



Primado2 Slim Motor



order code
P200-SMH-HS

Primado2 Slim Motor/HS

- Hand Control type
- Speed: Max. 80,000 min⁻¹
- Available handpieces: 21 kinds
- Bundled Item: Spray Adaptor for Slim (see p.40)

order code
P200-SMH

Primado2 Slim Motor

- Speed: Max. 80,000 min⁻¹
- Available handpieces: 21 kinds
- Bundled Item: Spray Adaptor for Slim (see p.40)

Slim Handpiece 200

for ø1.0 mm bur

80,000 min⁻¹

The Slim Handpiece 200 has a bur guard tip of 4.8mm in diameter, and is available in various lengths as well as straight and curved models. These deliver excellent performance in endoscopic procedures with limited viewing access. The bur guard can be removed using a wrench that is included with delivery, making maintenance easy.



order code
P200-1A135

Slim Handpiece200 L

- Long type
- Bur: ø1.0mm / Long

order code
P200-1A155

Slim Handpiece200 EL

- Extra Long type
- Bur: ø1.0mm / Extra Long

order code
P200-1A175

Slim Handpiece200 SL

- Super Long type
- Bur: ø1.0mm / Super Long

order code
P200-1A155-C

Slim Handpiece200 EL/Curved

- Extra Long , Curving type
- Bur: ø1.0mm / Extra Long

order code
P200-1A175-C

Slim Handpiece200 SL/Curved

- Super Long , Curving type
- Bur: ø1.0mm / Super Long

order code
P200-1ARA-W

Wrench for Slim/Super Slim

- Corresponding wrench for bur guard
- Included with Slim Handpiece 200




Super Slim Handpiece 200

for ø1.0 mm bur

20,000 min⁻¹

The Super Slim Handpiece 200 is designed with a bur guard tip of 2.1mm in diameter, and can rotate max. 20,000min⁻¹ allowing sensitive drilling in an endoscopic procedure possible. The bur guard can be removed using a wrench that is included with delivery, making maintenance easy.



order code
P200-RA135

Super Slim Handpiece200 L

- Long type
- Bur: ø1.0mm / Long

order code
P200-RA155

Super Slim Handpiece200 EL

- Extra Long type
- Bur: ø1.0mm / Extra Long

order code
P200-RA330


Super Slim Handpiece200 SPL

- Special Long type
- Bur: ø1.0mm / Special Long

order code
P200-1ARA-W

Wrench for Slim/Super Slim

- Corresponding wrench for bur guard
- Included with Super Slim Handpiece 200



Standard Angled Handpiece 200

for ø2.35 mm bur

80,000 min⁻¹

Five different length of handpieces are available with the Standard Angled Handpiece 200. This allows surgeons to deal with various types of operations. Perfect rotation balance and cutting balance performance are achieved.



order code P200-2AMS

Std. Angled Handpiece200 MS

- Mini type
- Bur: ø2.35mm / MS

order code P200-2AES

Std. Angled Handpiece200 ES

- Extra Short type
- Bur: ø2.35mm / Extra Short

order code P200-2AS

Std. Angled Handpiece200 S

- Short type
- Bur: ø2.35mm / Short

order code P200-2AM

Std. Angled Handpiece200 M

- Medium type
- Bur: ø2.35mm / Medium

order code P200-2AL

Std. Angled Handpiece200 L

- Long type
- Bur: ø2.35mm / Long

Irrigation Nozzle

order code
PD-IN-D
For P200-2AMS (MS)

order code
PD-IN-2ES
For P200-2AES (ES)

order code
PD-IN-2S
For P200-2AS (S)

order code
PD-IN-2M
For P200-2AM (M)

order code
PD-IN-2L
For P200-2AL (L)

Standard Straight Handpiece 200

for ø2.35 mm bur

80,000 min⁻¹

Five different length of handpieces are available with the Standard Straight Handpiece 200. This allows surgeons to deal with various types of operations. Perfect rotation balance and cutting balance performance are achieved.



order code P200-2SMS

Std. Straight Handpiece200 MS

- Mini type
- Bur: ø2.35mm / MS

order code P200-2SES

Std. Straight Handpiece200 ES

- Extra Short type
- Bur: ø2.35mm / Extra Short

order code P200-2SS

Std. Straight Handpiece200 S

- Short type
- Bur: ø2.35mm / Short

order code P200-2SM

Std. Straight Handpiece200 M

- Medium type
- Bur: ø2.35mm / Medium

order code P200-2SL

Std. Straight Handpiece200 L

- Long type
- Bur: ø2.35mm / Long

Irrigation Nozzle

order code
PD-IN-D
For P200-2SMS (MS)

order code
PD-IN-2ES
For P200-2SES (ES)

order code
PD-IN-2S
For P200-2SS (S)

order code
PD-IN-2M
For P200-2SM (M)

order code
PD-IN-2L
For P200-2SL (L)

Perforator Handpiece 200

1,250 min⁻¹

The high performance handpiece for trephination. It delivers stable torque and achieves smooth and powerful cutting performance.



order code
P200-PER
Perforator Handpiece200
• Compatible Chuck: Hudson Chuck

Drill Handpiece 200

for ø2.35 mm Twist Drill

80,000 min⁻¹

The corresponding handpiece for a trephination.



order code
P200-2SD
Straight Drill Handpiece200
• Bur: ø2.35mm twist drill



Irrigation Nozzle
order code
PD-IN-D
For P200-2SD

Craniotome Handpiece 200

for ø3.17 mm bur

80,000 min⁻¹

The high performance handpiece designed for cranial surgery. Three different types of duraguards are available for variable cranial bone thickness. The smooth and powerful cutting performance avoids adding additional stress to the surgeon.



order code
P200-CRA
Craniotome Handpiece200
• Bur: Craniotome bur, Router bur
• Bundled Item: P200-CRD-M



order code
P200-CRD-P
Pediatric Duraguard200
• Bur: Pediatric Craniotome bur,
Pediatric Router bur




order code
P200-CRD-M
Medium Duraguard200
• Bur: Medium Craniotome bur,
Medium Router bur



order code
P200-CRD-L
Long Duraguard200
• Bur: Long Craniotome bur,
Long Router bur

High Torque Motor Series

- High Torque** : High torque motor delivers advanced cutting performance.
- Versatile** : Standard and hand control type are newly introduced.
- Easy Maintenance** : All of the motors and handpieces can be washed by a thermo disinfecter.

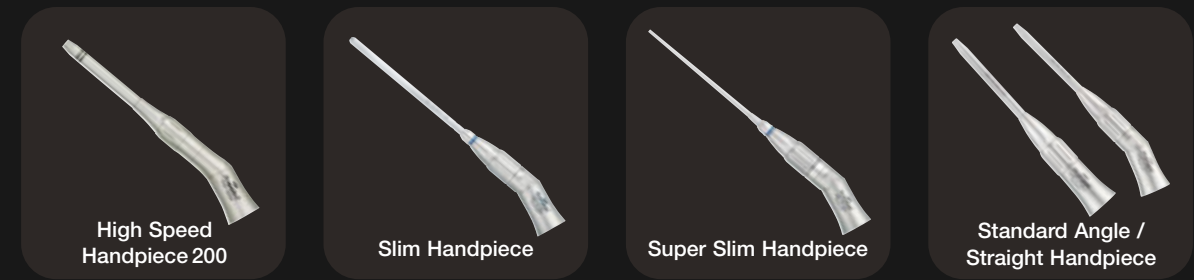

Primado2 High Torque Motor



order code
P200-HMH-HS
Primado2 High Torque Motor/HS

- Hand Control type
- Speed: Max. 60,000 min⁻¹
- Available handpieces: 24 kinds

order code
P200-HMH
Primado2 High Torque Motor

- Speed: Max. 60,000 min⁻¹
- Available handpieces: 24 kinds

High Speed Handpiece 200

for ø3.17 mm bur

100,000 min⁻¹

A maximum rotational speed of 100,000 min⁻¹ is attained with use of the motor increaser.
Its powerful cutting performance is most suitable for open surgery.



order code
P200-3GAS

High Speed Handpiece200 S

- Short type
- Bur: ø3.17mm / Short

order code
P200-3GAM

High Speed Handpiece200 M

- Medium type
- Bur: ø3.17mm / Medium

order code
P200-3GAL

High Speed Handpiece200 L

- Long type
- Bur: ø3.17mm / Long



Irrigation Nozzle

order code
PD-IN-3S

For P200-3GAS (S)

order code
PD-IN-3M

For P200-3GAM (M)

order code
PD-IN-3L

For P200-3GAL (L)

Slim Handpiece

for ø1.0 mm bur 60,000 min⁻¹

The Slim Handpiece has a narrow bur guard tip of 4.8mm in diameter. It allows direct visualization of a bur in surgical procedures with limited viewing access.



order code
PD-1A135

Long Slim Handpiece

- Long type
- Bur: ø1.0mm / Long

order code
PD-1A155-10

Extra Long Slim Handpieces with a curvature of 10°

- Extra Long type
- Bur: ø1.0mm / Extra Long

order code
PD-1A175-10



Super Long Slim Handpieces with a curvature of 10°

- Super Long type
- Bur: ø1.0mm / Super Long

Super Slim Handpiece

for ø1.0 mm bur 24,000 min⁻¹

The Super Slim Handpiece is designed with a bur guard tip of 2.1mm in diameter. Maximum rotational speed of 24,000 min⁻¹ allows sensitive cutting in endoscopic operations possible.

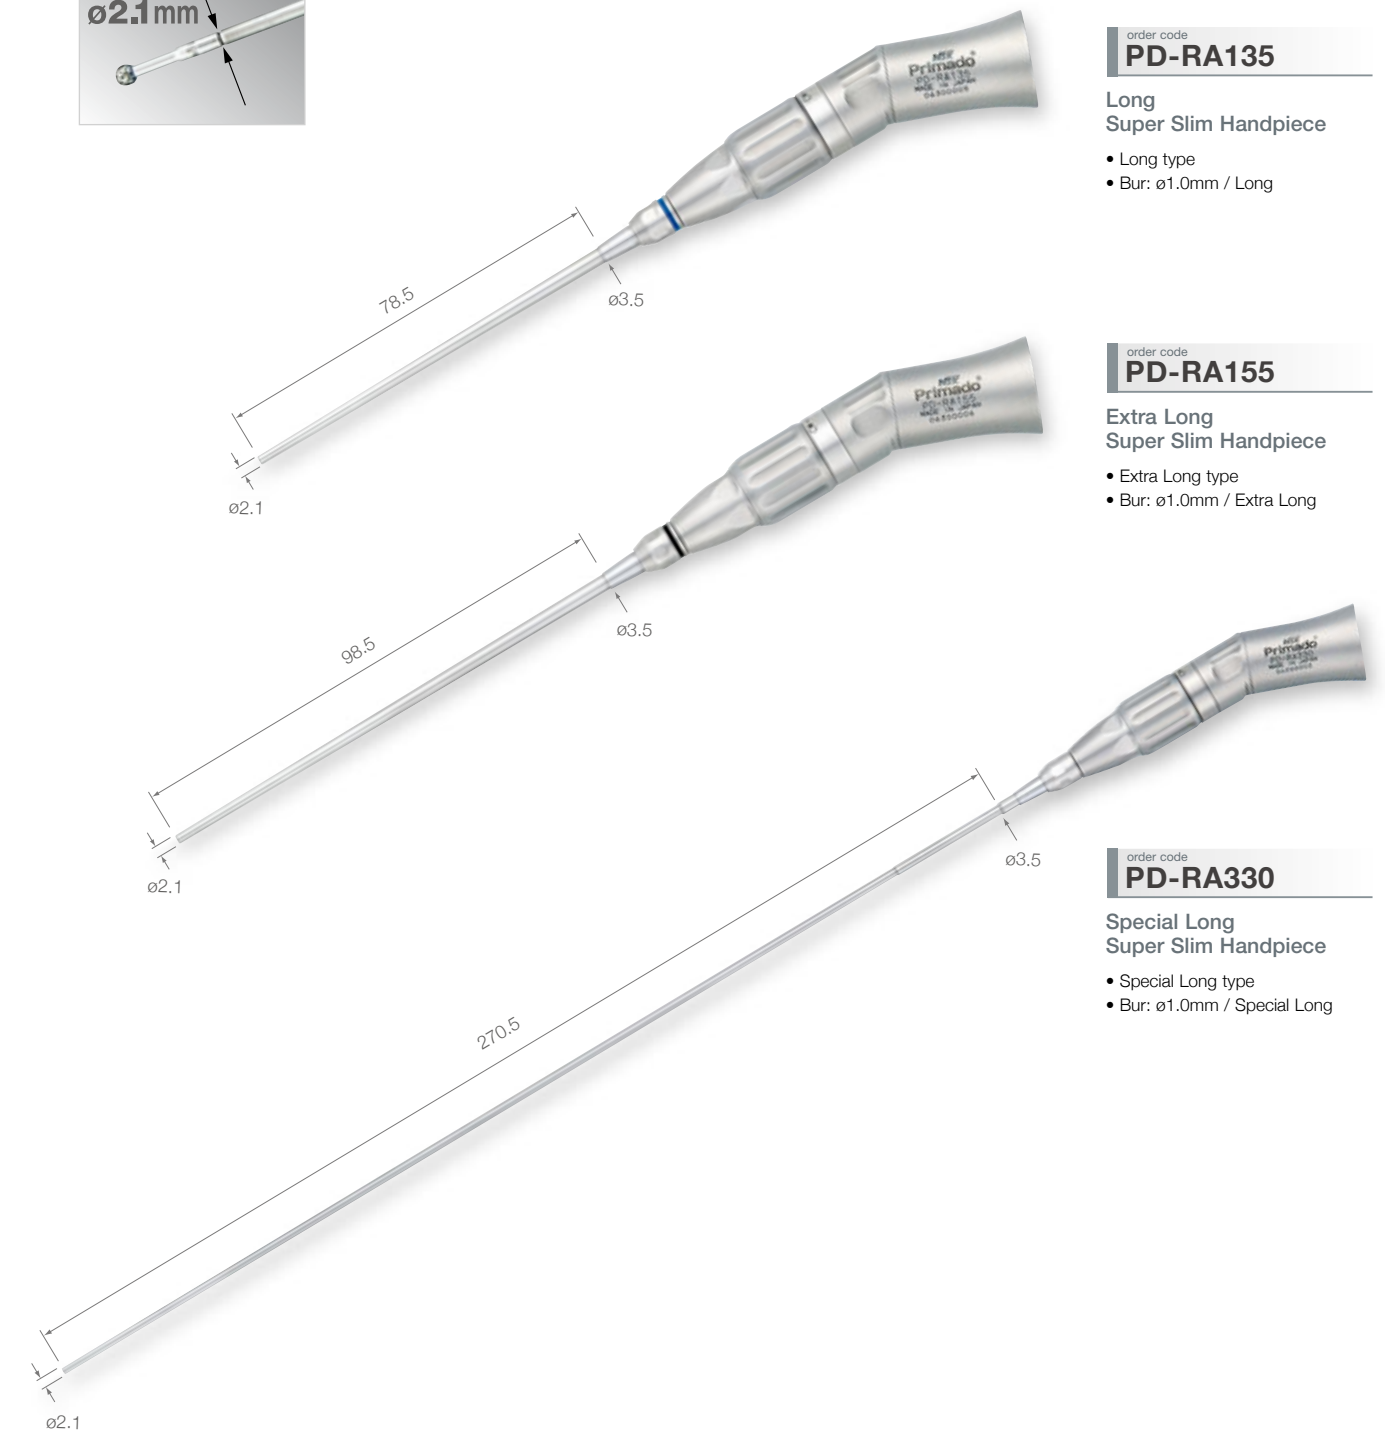

order code
PD-RA135

Long Super Slim Handpiece

- Long type
- Bur: ø1.0mm / Long

order code
PD-RA155

Extra Long Super Slim Handpiece

- Extra Long type
- Bur: ø1.0mm / Extra Long

order code
PD-RA330

Special Long Super Slim Handpiece

- Special Long type
- Bur: ø1.0mm / Special Long

Standard Angled Handpiece

for ø2.35 mm bur

60,000 min⁻¹

The Standard Angled Handpiece comes available in four different lengths to support diverse procedures, each with excellent cutting performance and stability.



order code
PD-2AES

Extra Short
Standard Angle Handpiece

- Extra Short type
- Bur: ø2.35mm / Extra Short

order code
PD-2AS

Short
Standard Angle Handpiece

- Short type
- Bur: ø2.35mm / Short

order code
PD-2AM

Medium
Standard Angle Handpiece

- Medium type
- Bur: ø2.35mm / Medium

order code
PD-2AL

Long
Standard Angle Handpiece

- Long type
- Bur: ø2.35mm / Long

Irrigation Nozzle

order code
PD-IN-2ES
For PD-2AES (ES)

order code
PD-IN-2S
For PD-2AS (S)

order code
PD-IN-2M
For PD-2AM (M)

order code
PD-IN-2L
For PD-2AL (L)



Standard Straight Handpiece

for ø2.35 mm bur

60,000 min⁻¹

The Standard Straight Handpiece comes available in three different lengths to support diverse procedures, each with excellent cutting performance and stability.



order code
PD-2SES

Extra Short
Standard Straight Handpiece

- Extra Short type
- Bur: ø2.35mm / Extra Short

order code
PD-2SS

Short
Standard Straight Handpiece

- Short type
- Bur: ø2.35mm / Short

order code
PD-2SM

Medium
Standard Straight Handpiece

- Medium type
- Bur: ø2.35mm / Medium

Irrigation Nozzle

order code
PD-IN-2ES
For PD-2SES (ES)

order code
PD-IN-2S
For PD-2SS (S)

order code
PD-IN-2M
For PD-2SM (M)



Perforator Handpiece

1,200 min⁻¹

The high performance handpiece for trephination. It delivers stable torque, and achieves smooth and strong cutting performance.



order code
PD-PER
Perforator Handpiece
• Compatible Chuck: Hudson Chuck

Craniotome Handpiece

for ø3.17 mm bur

60,000 min⁻¹


The high quality handpiece designed for craniotomy. Three different types of duraguards are available for variable cranial bone thickness. Strong cutting performance assists in a smooth operation.




order code
PD-CRA
Craniotome Handpiece
• Bur: Craniotome bur, Router bur
• Bundled Item: PD-CRD-M



order code
PD-CRD-P
Pediatric Duraguard
• Bur: Pediatric Craniotome bur, Pediatric Router bur



order code
PD-CRD-M
Medium Duraguard
• Bur: Medium Craniotome bur, Medium Router bur

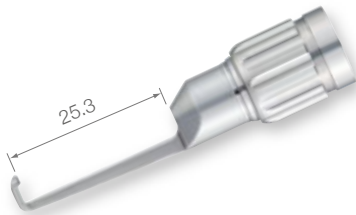

order code
PD-CRD-L
Long Duraguard
• Bur: Long Craniotome bur, Long Router bur

Drill Handpiece

for ø2.35 mm Twist Drill

60,000 min⁻¹

The corresponding handpiece for a trephination. The NSK Drill Handpiece is available in straight and angled models for various types of operations.



order code
PD-2SD

Straight Drill Handpiece

- Bur: ø2.35 mm Twist Drill



order code
PD-2SDM

Straight Drill Handpiece M

- Corresponds to ø2.35mm burs



order code
PD-2AD

Angled Drill Handpiece

- Bur: ø2.35 mm Twist Drill



order code
PD-2ADM

Angled Drill Handpiece M

- Corresponds to ø2.35mm burs



Irrigation Nozzle

order code
PD-IN-D

For PD-2SD, PD-2AD



order code
PD-IN-2ES

For PD-2SDM, PD-2ADM

Contra Angle Handpiece

The Contra Angle Handpiece is useful when approaching at a blind angle. It is available in two types of speed reduction: 16:1 and 64:1.



order code
PD-CA-16

Contra Angle Handpiece
16:1 Reduction

- 16:1 Reduction (Speed: Max. 3,750 min⁻¹)
- Latch Type Chuck
- Corresponds to ø2.35mm CA burs



order code
PD-CA-64

Contra Angle Handpiece
64:1 Reduction

- 64:1 Reduction (Speed: Max. 940 min⁻¹)
- Latch Type Chuck
- Corresponds to ø2.35mm CA burs

Micro Bone Saw Series


- Slim Design** : The streamlined design with the reduced weight delivers well-balanced handling.
- High Performance** : Excellent cutting performance paired with low rotational vibration creates smooth operation.
- Easy Maintenance** : All of the motors and handpieces can be washed by a thermo disinfector.
- Durable** : Motors and handpieces are made to be highly durable due to NSK's long years of experience in high precision technology, and are protected with a NSK original special coating called DURACOAT, creating long-lasting and scratch-free quality products.



Primado2 Reciprocating Saw Handpiece



Primado2 Sagittal Saw Handpiece



Primado2 Oscillating Saw Handpiece

Primado2 Reciprocating Saw Handpiece 20,000 min⁻¹



order code
P200-REC-S

Primado2 Rec. Handpiece

- Speed: Max. 20,000 min⁻¹
- Stroke Length: 2.5 mm
- Blade: Reciprocating Saw Blades, Reciprocating Rasps
- Bundled Item: Spray Adaptor for Bone Saw (see p.40)



order code
P200-REC-S-HS

Primado2 Rec. Handpiece/HS

- Hand Control type
- Speed: Max. 20,000 min⁻¹
- Stroke Length: 2.5 mm
- Blade: Reciprocating Saw Blades, Reciprocating Rasps
- Bundled Item: Spray Adaptor for Bone Saw (see p.40)



Irrigation Nozzle

order code
P200-IN-BS

For P200-REC-S, P200-REC-S-HS

Primado2 Sagittal Saw Handpiece

20,000 min⁻¹



order code
P200-SAG-S

Primado2 Sag. Handpiece

- Speed: Max. 20,000 min⁻¹
- Angle of Oscillation: 8°
- Blade: Sagittal and Oscillating Saw Blades
- Bundled Item: Spray Adaptor for Bone Saw (see p.40)



order code
P200-SAG-S-HS

Primado2 Sag. Handpiece/HS

- Hand Control type
- Speed: Max. 20,000 min⁻¹
- Angle of Oscillation: 8°
- Blade: Sagittal and Oscillating Saw Blades
- Bundled Item: Spray Adaptor for Bone Saw (see p.40)



order code
P200-IN-BS

For P200-SAG-S, P200-SAG-S-HS

Primado2 Oscillating Saw Handpiece

20,000 min⁻¹



order code
P200-OSC-S

Primado2 Osc. Handpiece

- Speed: Max. 20,000 min⁻¹
- Angle of Oscillation: 8°
- Blade: Sagittal and Oscillation Saw Blades, Oscillating Saw Blades (for Intra Oral)
- Bundled Item: Spray Adaptor for Bone Saw (see p.40)



order code
P200-OSC-S-HS

Primado2 Osc. Handpiece/HS

- Hand Control type
- Speed: Max. 20,000 min⁻¹
- Angle of Oscillation: 8°
- Blade: Sagittal and Oscillation Saw Blades, Oscillating Saw Blades (for Intra Oral)
- Bundled Item: Spray Adaptor for Bone Saw (see p.40)



order code
PD-OSC-A

Adaptor

- Blade: Oscillating Saw Blades (for Intra Oral)
- Bundled Item: Corresponding wrench(1), and screws (2)



order code
P200-IN-BS


For P200-OSC-S, P200-OSC-S-HS

Wire Pin Driver Series

- Powerful** : Delivers powerful pinning, wiring, and drilling through elaborate design.
- Ergonomic Design** : Smart design lies comfortably in the surgeon's hand and creates smooth handling and high operability.
- Easy Maintenance** : All of the motors and attachments can be washed by a thermo disinfectant.



Wire & Pin Collet



Drill Attachment



Reamer Attachment



Saw Attachment

Primado2 Wire Pin Driver



order code
P200-WPD

Primado2 Wire Pin Driver

- Speed : Max. 1,200 min⁻¹
- Rotation Mode: Forward, Reverse, Oscillating
- Bundled Item: Spray Adaptor (see p.40)

Wire & Pin Collet 1,200 min⁻¹



order code
PD-DA-W
Primado Wire Collet
• ø0.6~ø1.9 mm



order code
PD-DA-P
Primado Pin Collet
• ø2.0~ø3.2 mm

Drill Attachment 1,200 min⁻¹



order code
PD-DA-J4
Jacobs Keyed Drill Chuck
• ø0.5~ø4.0 mm



Bundled Item: T wrench



order code
PD-DA-J6
Jacobs Keyed Drill Chuck
• ø0.5~ø6.5 mm



Bundled Item: T wrench



order code
PD-DA-A
AO Drill Chuck



order code
PD-DA-K
Keyless Drill Chuck

Reamer Attachment 300 min⁻¹



order code
PD-RA-M
Hudson Modified
Trinkle Reamer



order code
PD-RA-H
Hudson Reamer



order code
PD-RA-T
Trinkle Reamer



order code
PD-RA-A
AO Reamer

Saw Attachment 12,000 min⁻¹




order code
PD-SA-R
Reciprocating Saw
Attachment
• Blade: Reciprocating Saw Blades,
Reciprocating Rasps



order code
PD-SA-S
Sagittal Saw Attachment
• Blade: Sagittal and Oscillating Saw Blades


Sterilization Case




order code
SC-ML
Sterilization Metal Lid



order code
SC-T-F
Sterilization Tray Divider-Free
• Dimensions :
W480 x D250 x H60 (mm)



order code
SC-C-H70
Sterilization Case/H70
• Dimensions :
W512 x D262 x H70 (mm)



order code
SC-SM
Silicone Mat
• The mat for the Sterilization Tray



order code
SC-C-H125
Sterilization Case/H125
• Dimensions :
W512 x D262 x H125 (mm)

Mobile Trolley

NSK offers a specially designed mobile trolley for the Primado control unit which is not only practical but also elegant. In this way, all the equipment can be stored in one place allowing easy access when needed. The trolley has adjustable height, lockable wheels and a bracket for the cable on the side.



order code
Z299
iCart-L Mobile Trolley
• Dimensions :
W360 x D420 x H800 (mm)
• Weight : 10 kg

Irrigation Tube



order code
PD-IT-S
Surgical Irrigation Tube
• Pack of 10 (Sterilized)


Maintenance

PANA SPRAY Plus is a specially formulated, highly effective general handpiece lubricant. Frequent application of PANA SPRAY Plus will assure handpiece performance and durability. Apply PANA SPRAY Plus to handpieces after "Cleaning" in the maintenance process.



order code
Z182100
PANA Spray Plus
• For Handpieces, 480 mL
• Alcohol-contained Lubricant

order code
Y900630
PANA Spray Plus (6pcs)
• Pack of 6

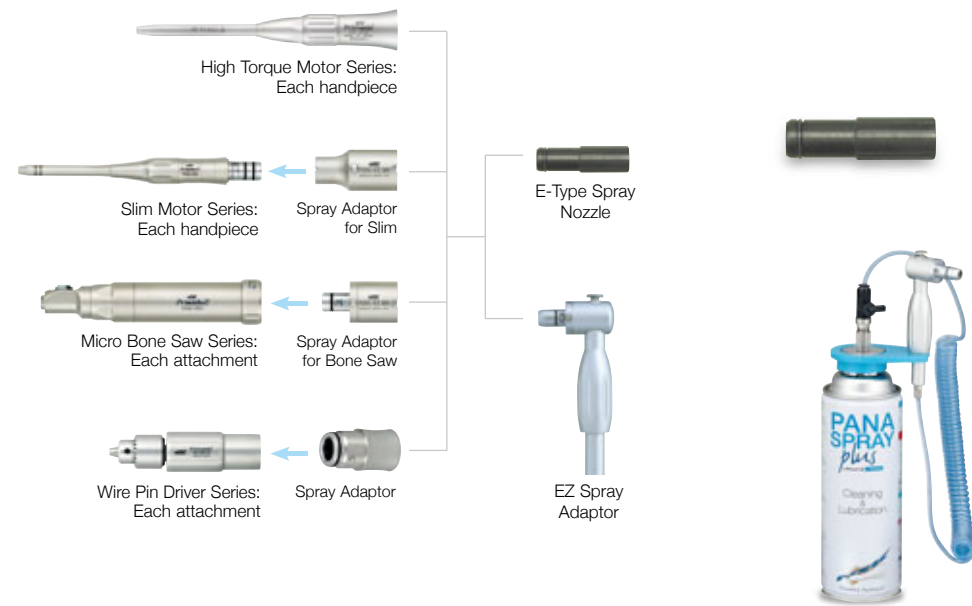

order code
Z019090
E-Type Spray Nozzle
• For Handpieces

order code
PD-EZ-M
EZ Spray Adaptor
• PANA Spray Plus is not included

Spray Mist Absorber

A convenient way to avoid mist spray from escaping into the environment. Simply insert the handpiece into the Absorber Pack then apply the spray lubricant.



order code
Y900084
Spray Mist Absorber
• Pack of 10